


UNIVERSAL FERNBEDIENUNG

LM-367

81

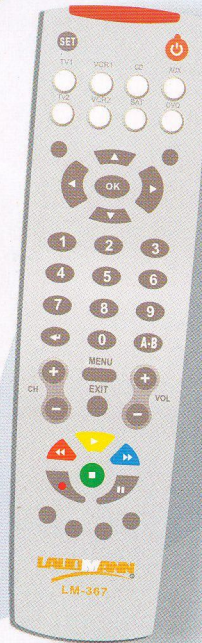

TV/TV1



DVD



VCR1/VCR2



SAT



CD



AUX

GB

DE


CZ

PL

LAUDMANN
Germany

Set Code

First find your TV model(or other appliances) code; then you press and hold button “SET” and press selected equipment button, the indicator will light on; release both buttons and now the indicator keeps on. Input 3 digits and the indicator will switch off;the setting steps are completed.

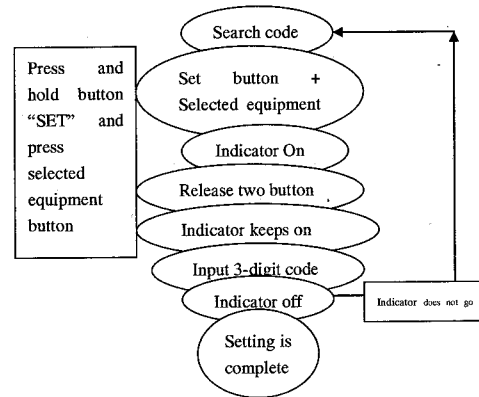

Manual Code Search

If you do not know your appliance's brand or can not find

its code, you may find its code manually; first press and hold "SET" button, and then press selected equipment button. The indicator will keep light on; now press again "SET" button, the indicator will flash. Point your control toward TV and press "POWER" button, and one code will be sent each time you press until TV is turned off. Immediately press selected equipment button, otherwise the next code may be locked. Use the same method to set other appliances.

Auto Code Search

- 1: Power on the Device first. If the device is VCR, CD, LD or DVD, insert the Tape or Disc first.
- 2: Press and hold "SET" button. And press and hold "DEVICE" button for 3 seconds until the indicator lights on, release both buttons, then the indicator flashes-one code will be sent for each flash.
- 3: Put the remote control toward TV; when TV is turned off, press equipment button immediately to save the code. Now TV should be able to turn on by pressing "POWER" button, and the setting procedure is completed.

Note: you have to be very patient since it may take a long time to search the code. Press any button immediately to save the code when TV is turned off; otherwise the saved code may be the next one.

The user can press the "Set" key in the searching mode to change the code searching direction.

Using remote control

Press "TV" button, all button function on control panel are switched to TV controlling; and press "VCD/DVD" button to switch all button function on control panel to VCD/DVD player controlling

Trouble – shooting

- Carefully follow the steps to set your control: when the first group code can not control your TV, try remaining codes; if all codes are ineffective or your TV set brand is not on the code list, try "code auto-search".
- If you mis-press a button during inputting a code, re-input correct code as long as the indicator is lit on; if the indicator is not lit on, you have to start all over again.
- Exam batteries are placed right or not, and you may need to reset code after replacing with new batteries.
- Exam your TV receiving function. This control does work on TV set that does not have receiving function or its receiving function does not work well.
- This remote control may be "DEAD" under certain mis-operation conditions. In such a case, just take the batteries for 20 minutes, place in batteries again and it will be restored to normal state

Usanza del controllo remoto

Preme il bottone **TV**, tutti questi bottoni sulla guirna controllata sono cambiato per controllare il TV, e preme il bottone **VCD/DVD** per cambiare tutti i bottoni sul guirna controllata al VCD/DVD controllo.

Problemi salvazione

- segue cautamente i passi per installare il suo controllo: quando il primo gruppo di codice non controlla il suo TV, prova i resti codici: se tutti i codici sono inefficaci o la sua marca di TV non è sulla lista del codice, prova **Cerca del codice automatico**.
- se manca di premere un bottone quando introduce un codice, reintroduce correttamente il codice soltanto quando l'indicatore è acceso. Se l'indicatore non è acceso, deve cominciare tutto di nuovo.
- esamina la batteria che è nel proprio posto, e deve installare di nuovo il codice dopo rimettere la nuova batteria.
- esamina la suo TV funzione di ricevere. Questo controllo non lavora sul TV che non ha la funzione di ricevere o la sua funzione di ricevere non è bene.
- questo controllo remoto può essere **DEAD** sotto una situazione della operazione persa. In questo caso, solo prende la batteria per 20 minuti, e poi mette di nuovo la batteria, si può diventare in normale situazione.

TV

Brand	
ACE	713
Admiral	032,155
Aiwa	261
Akai	005,159,169
Albiral	001
Amstrad	006
ANSA	026,027,033,706 ,708,709,712,714
SAS	007,009,013,032 ,094,155,161
Audiosonic	160
Ausind	008
Autovox	004,007,012,014 ,015,078,079,104,153
AWA	033,159,160,189 ,220
Baird	162
Basic Line	163
Brionvega	104,155,164,165 ,200, 201,257
BEKO	170,226
Blaupunkt	010,017,018,020 ,054,231,232,233,234,236,241
BPL	026,160,162,163

TV

Brand	
Bruns	158
BSR	016,019,021
Bush(UK)	022
Cabletime	246,247,251
Century	145,146,155
CGE	019,023,024,145 ,151,169,170,231
CGM	093
Chaparral	216
Clarivox	001,166,167
CODIAM	138
Contec	033,016
Crosley	024,025,145,155 ,231
CTC Clatronic	096
Daewoo	168,209
Decca(UK)	002,004,026,028 ,031258
Dual	255,258
Dual-Tec	004,011,019,029
Dumont	155
Elbe	001,171
Elite	108
Elman	019,029
Emerson	146,155

TV

Brand	
Europhton	000,004,019,029,030146
Fidelity (UK)	003,034,229
Fenner	033,193,240
Filmnet	202,248
Finlux	007,008,009,013,025026,029,035,094,161169,221
Fisher	025,036,155,167,170,255
Formenti-Phoenix	003,008,025,037,038,159
France Telecom	266
Funai	016,160
GBC	002,004,019,025,026,031,033,039,040,041,042
Geloso	004,019,025,032,033,039,148,150
Goldstar	003,004,043,080,153172,252,700,701
Goodmans	119
Gorenje	170,173
Hantarex	000

TV

Brand	
Granada (UK)	002,004,027,041,044045,046,047,048,049
Great Wall	253
Grundig	003,010,018,020,045050,051,053,054,056094
Hanseatic	025,027,037,044,052,055,258
Hauppauge	026
Hemmermann	057
Hinari	033,044,058,059,060
Hotel TV	704
Hitachi	004,040,041,042,044047,055,061,062,063064,065,066,067,068174,221,222,710
Hyper	003,004,033,153,193
Imperial	019,023,024,145,151169,170,231
Inno Hit	000,004,031,043,060146,175
INTER (265)	725

TV

Brand	
Interfunk	005,027,040,045,046052,069,070,071,073075,155
Irradio	008,039,043,060,153262
IT	723
ITT-Nokia	005,032,033,040,041045,049,069,070,071072,074,076,162,168176,177
Jasco	249,250
Brand	
JVC	077,119,178,179
Kaisui	163
Karcher	159,163,175
Kendo	146
Kennedy	025,078,079
KONIG	027
Korting	037,155,157
Linco	033,039,183,238,239240
Lenoir	004
Loewe Opta	052,081,155,156,189,213,242
Logik	028
Luma	032,082

TV

Brand	
Luxor	005,045,047,055,068083,084,085,086,087162,177
Magnadyne	000,019,025,029,057,147,149,150,155
Magnafon	000,003,008,029,030
Marantz	026,027
Matsui	004,006,028,041,088,182
Metz	018,053,089,090,091155,180,183
Maximal	058
Minerva	010,018,045,051,053
Mitsubishi	044,052,092,119,154155,181,182,707
Brand	
Mivar	000,003,093,094,095245,259
Multisystem	159
Multitech	096,170,172
Murphy(UK)	041
NEC	184

TV

Brand	
Neckermann	004,026,044,055,082097,170
N.E.I.	166
Nobliko	003,008,029,051,146
NOKIA	720
Nordmende	065,067,075,098,099100,101,102,103,104134,185,186,222
Oceanic(F)	005,040,105,106,107
Onceas	004
Orion	006,016,028,057,088108,109,187,188,189
Otto Versand	025,027,044,052,055
Panasonic /National	001,003,019,037,040106,110,111,112,114,190,212,241
Philco	019,023,024,025,151155,169,170,231
Phiex	229
Paladium	197
Praxis	217

TV

Brand	
Philips	003,026,027,046,073113,115,155,191,192193,194,223,266,230242
Phonola	175
Pilot (1624Y)	729(PIP)
Pilot (P1707Y)	721
Pilot (P3033)	727
Pilot (P4005)	726
Pilot(P567)	728
Pilot(P716)	724
Polestar	214
Pioneer	000,027,067,243
Prandoni-Prince	008,032,146
Prosat	001
SABA	000,065,067,075,085098,099,100,103,117155,185,186,222,224
Radiola	242
REX	011,021,032,078,079118
Rank(UK)	022

TV

Brand	
Quelle	004,005,007,008,009010,013,016,026,027028,045,050,051,052069,094,153,221,231232,234,235,236
RBM(UK)	022,094
RCA	204,210,211
Rediffusion (UK)	005,041,116
Roadstar	039
SEG	096
Saisho	004,006,028,088,182244
Salora	005,047,048,055,066068,069,076,082,086097,162,177,195,249250,267,268
Sambers	000,004,008,029,030043
Samsung	026,033,043,159,160170,175,212,215,702703,716
Sanyo	013,031,044,074,119120,121,122,123,162167,170,182,195,205

TV

Brand	
Seleco	011,058,078
Schneider	004,011,015,019,025026,036,038,255,258262
Sharp	044,054,119,124,196198,225,227
SHOV	033
Siarem	000,025,029,155
Sicatel	001
Siemens	010,231,232,233,234236
Siesta	254
Silver	160
Singer	025,029,147,149,155
Sinudyne	006,016,025,026,029057,109,125,155,192197
Sony	028,119,126,127,128129,130,182,199,228260,705
Stern	078
Tai Wah.	218,219
Tandberg	016,180,266
Tatung	002,004,026,028,031131
Tele+1	248
Teleavia	186

VCR

Brand	
Akai	269,270,271,309,310,356,357
Anistsch	311
SAS	282
Baird	271,273
Blaupunkt	272,074,275,312,369
Brionvega	276,283
Bush(UK)	281
CGE	270,277
CGM	291
Dansai	281
Decca(UK)	278
Dual	273,279
Elbe	313
Emerson	286
Finlux	278
Fisher	280,314,315,316
Funai	359
GBC	281
GEC(UK)	278
General	358
Goldstar	282
Goodmans	301
Granada(UK)	272,278,283,314,369
Grundig	272,275,284,361,369

VCR

Brand	
Hanseatic	278,285
Geloso	281
Hinari	281,286,287,317,360
Hitachi	273,281,285,288
Imperial	277,289
Interfunk	278,290
ITT-Nokia	270,273,276,290,291,292,316
JVC	270,273,292,318,319,320,321,328
Linco	325,355
Loewe Opta	272,278,369
Logik	287,322,360
Luma	322
Luxor	285,291
Magnasonic	291
Marantz	272,278,301
Matsui	287,322,332
Memorex	282,314
Metz	272,275,294,369,370
Minerva	272,275,369
Mitsubishi	278,281,293,320,362,751
Multitech	281,325
NAD	363

VCR

Brand	
NEC	273,313,320
Neckerman	270,272,273,278,285,286,369
Noblisko	272,369
Osaki	282
Normmende	270,273,279,292,295,296,297,318,319,321,323,324,326,327,328,329,330
Orion	286,322,331,332,333,360
Osaki	282
Otto Versand	278,285
Paladium	271,356
Panasonic National	274,290,312,354
Philips	278,302,334,335,336,369
Phonola	278,335
Pilot (1621Y)	753(Video2)
Pilot (P1528Y)	752
Pilot (P3050)	754
Pioneer	278,320,334,336,363,364,365

VCR

Brand	
PYE	320
Quartz	314
Quelle	272,275,278,286,298,369
SABA	270,273,279,292,295,318,319,321,326,337,338
Saisho	286,287,322,332,360
REX	273,292,319
RCA	349
Salora	283,285,314
Samsung	289
Sansui	320
Sanyo	291.314.316.339
Schneider	278,281,289
Brand	
Sears	315
SEG	281,289
Seleco	309
Senta	277
Sharp	301,302,341
Shinton	356
Siemens	272,275,291,369
Sinudyne	278,287
Sony	298,299,340,342,343,344,367,750

VCR

Brand	
Tandberg	322
Tatung	278
Telefunken	270,273,279,292, 318,319,321,32 3,330,345,346,3 47
Telemaster	359
TMK	286
Toshiba	273,292,307
Thorn-Ferguson	270,273,300,303, 304,305,306,30 8,319,329,330,3 48,368
Thomson	270,273,279,292, 318,323,324,32 8
Uher	273,289
Utravox	276
Vector	313
Victor	318,328,366
Video	313
White Westinghouse	276,282
Xenon	322
Others	350,351,352,353

SAT

Brand	
AB	812
Alba	407
Alfa Gold	810,811
AlphaStar	826
Amstar	847
Amstrad	371,372,408,488
Ankaro	373
ANSA	462,498,821,825, ,827,855,880,88 2,883
Apollo	402
Astra	372,409,488
Astro	502
ASTRX	840,842,843,846
Aura	430,487
Bardom	373
Benjamin	468
BEST	453
Bush(UK)	402
Cambridge	375
CANAL+	804
Chaparral	216,374,410
DNT	409,428,430,487
Drake	376,445,446,447, 495
Dynasat	491,492
EMME ESSE	463,464,465

SAT

Echostar	377,378,379,386 409,411,412,457 458,461,462,486 800,827,862
EH.Galaxy	514,858
ELSAT	822
Electrosat	870
Eurosky	421
Euro Space	850
Eurostar	465,872
Finlux	414,415
Force	836
Fortec Star	458,808,809,846 850,851,852,853 854,856,857,859 866,867,876,878 879
Brand/Device	SAT/DSS
Fracarro	380,381
Freecom	426
FTE	399
Fuba	413
Funtach	823,824
Galaxys	873
Giucar Record	382,416
Grundig	383,400,402,484
Hirshmann	415

SAT

HTS	827
Hughes	828,829
Hitachi	483,828,829
Humax	505
Huth	421,479
HWALIN	816
ICX International	417
ITT-Nokia	384,385,418
Jeemon	386
Jerrold	454
Johansson	387
JSR	386
Kathrein	388,389,390,419 469
Linco	423,426,480,481 482
Luxor	384,391,392
Macab	420
Macom	444
Magnavox	477,830,831
Maspro	388,393,402,490
Metz	383
Microsat	874
MINA	494
Minerva	383,400,484
Mitsubishi	489
MME	217

SAT

Brand	
Morgans	421
NEC	422,478,493
Neckermann	421
Neosat	845
Network	394
Tedelex	466
NOKIA	502,720,807
Obritech	426
Pace	394,395,400,402,485,814,815
Palcom	396
Paladium	421
Palsat	423
Panasat	819,863
Panasonic/National	473,832
Pansat	455
Philips	402,424,425,460,477,803,830,831,841
Pioneer	474
Premier	802
Primestat	454
Prosat	405,451,479
PSR	858
Quelle	383
Radix	409,428,430,487
RCA	450,818,835
RC-AK	456

SAT

Brand	
RM(RM2200)	860
RTG.(Space Net)	846
Sakura	397,398
Salora	391,418
Samsung	459,475,476,801,877
SAT 100	372,488
Sateco	426
Sat.Receiver	514
Scientific Atanta	452
SET	825,837,838,839
Siemens	383
Signal	456,850,855
Sintrack	427
Sky Digital	880,881
Skymaster	479,882,883
Sony	472,834
Star	459,470,802,846,868,871,875
Stern	393
Strong	399,423,426,480,492,864,865,868
STS	393
STV	413
Super Max	846,848,849,850

SAT

Brand	
Sun Moon Star	813
Supex	858,862,869
Tadiran	817
Tantec	396
Technosat	263,467,802,869
Technisat	409,428,429,430,431,487
Teknika	471
Telemax	432
Telemeister	398,409,428,430,469,487
Thorn-Ferguson	394,395,400,401,402,433,485
Toshiba	442,444,833
TPS	805
Unbranded	481
Uneden	403,404,406,443,830,831
United Satellite	440
Electronics	417
Vector	430,487
Viewstar	477
Vortec	459,801,855
Vortic Star	801
Vtech	434
Winer	080,387,449,844

CABLE

Brand	
ABC	452
APO	516
Asiagiant	501,513
Eastern	507,508,509,510
GMI	499,515,519,521
IEEC	506,514
JEBSEE	496
Jerrold	417
LEON	499
OAK	500
Paragon	806
Skygiant	511,512
TADA	448,523
Tay Shoen	506,517
Toshiba	522
Trans	497,518,520
Winer	501
WISO	503,504

HIFI

Brand	HIFI
ANSA	644
Blaupunkt	568
Fisher	529
Hitachi	530
Kenwood	527,531,532,533,534
Linco	595,596,597,598,599,600,601
Nordmende	535,549
Onkyo	536,537
Panasonic/National	538
Pioneer	545
Sanyo	539
Sharp	531
Sherwood	540,541,577,578
Sony	617
Technics	542
Yamaha	543,544

CD

Brand	CD
Aiwa	581
ATLE	579
Denon	547
Fisher	546
Haitai	548
Inkei	541
JBL	623,624
JVC	605
Kathrein	549
Kenwood	550,580
Linco	060,549
Luxor	528
Magnavox	553,576,604
Mission	553
NEC	551
Onkyo	613,614,615,616
Philips	552,553,579,604
Pioneer	554,555,610
Proton	553
Radiotone	549
ROTEL	553,582,583
Sansui	603
Sanyo	604,606
Sharp	550,566
Sony	556,557,575,607

CD

Brand	
Sylvania	553,604
Teac	608,611
Technics	558,609
Victor	605
Yamaha	612

AUX

Brand	AUX
Blaupunkt	569(VHS)
Cabletime	524,525,526(CTV)
Denon	564(TUNE) 566(DECK)
Linco	585,586,587,588,589,590,591,592,593,594(CD)
Philips	560(E0), 561(PIP),562(TAPE),565(TUNE),567(DCC)
ROTEL	584(TAPE)
Sony	563(TAPE),575(CDV),618(TUNE)

LD/VCD/DVD

Brand	LD/VCD/DVD
Aiwa	626
Alba	680
ANSA	627,634,638,656
APEX	672
ATLM	671
Bush(UK)	680
Çaravell	622
CONIC	673
Daewoo	660
DCS	642
Denca	665
Desay	625
Ferguson	679
Goldstar	633
Haitai	648
JVC	664
Kenwood	572,630,663
Legend-V	650
Logik	669
Magnavox	571
Maxview	670
Microsoft X-BOX	620
Mitsubishi	662
NAD	184
Pacific	676,677,678,679
Panasonic National	573,574,629,639

LD/VCD/DVD

Brand	
Philips	559,675
Pioneer	571,658
RCA	602,661,667
Samsung	637,666
Sanyo	681
Schneider	679
Sharp	628
Sony	575,631,657
Tatung	659
Thomson	668
Toshiba	571,640
Zenith	570
Others	674
BBK	654
Cynco	646
Chang Hong	649-
Solve	641
TCL	632
Shinco	647
MKT	651
SMC	636
Xiaxing	652
IDALL	635,653
PANDA	645